




DEFLECTROLS

Deflectrols are designed to fit on the back of a grille or diffuser and protrude into the main duct in order to assist the flow of air from the main duct through the grille or diffuser where a sufficient length of stub duct is not possible.

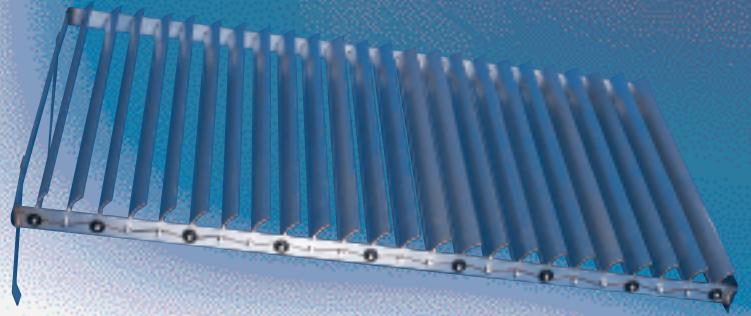

STANDARD ●
Code 0155. Deflectrol.

STANDARD SPECIFICATION

SIZES
50 mm increments on the nominal length from 100mm to 600mm and 100 mm to 450mm on the height.

CONSTRUCTION
Manufactured in aluminium with welded corners.

FINISH
Mill finish.

FIXING
The deflectrol would normally be fixed to the grille or diffuser at one end with the adjustment strap at the other end loose for on site adjustment and then securing by the customer.

PACKAGING
The deflectrol is normally packaged with the grille or diffuser.

STANDARD SPECIFICATION

TECHNICAL INFORMATION
The deflectrol can be raised or lowered, within the recommended distances, at the loose end and then fixed in the desired position in order to give some adjustment to the air volume.

ORDERING DETAILS

- The code for the basic panel should have 13 digits. See page 1.
- Please always give the length first and then the height.

EXAMPLE:
A deflectrol to fit a 300mm x 200mm nominal size grille would be coded - 0155/00300/0200.

Applications. Supply * Sidewall * Ceiling *

